



Specification

Cells Per Unit	6	
Voltage Per Unit	12	
Capacity	150Ah@10hr-rate to 1.80V per cell @25°C	
Dimension	Length	483 ± 2mm (19.0 inches)
	Width	170 ± 2mm (6.69 inches)
	Container Height	241 ± 2mm (9.49 inches)
	Total Height	350 ± 2mm (9.49 inches)
Weight	Approx. 44.5 Kg (Tolerance ±2%)	
Internal Resistance	Approx. 4.2 mΩ	
Terminal	F12(M8)/F5 (M8)	
Max. Discharge Current	1500A (5 sec)	
Design Life	12 years (floating charge)	
Maximum Charging Current	45 A	
Reference Capacity	C3	117.4AH
	C5	132.0AH
	C10	150.0AH
	C20	157.9AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell	
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell	
Operating Temperature Range	Discharge: -20°C~50°C	
	Charge: 0°C~40°C	
	Storage: -20°C~60°C	
Normal Operating Temperature Range	25°C±5°C	
Self Discharge	MC Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C.Please charged batteries before using.	
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.	

Applications

- ◆ Tele-communication central station (wired or cellular)
- ◆ Power system communication, military communication, etc.
- ◆ Network communication including: data transmission, television signal transmission, etc.
- ◆ Uninterruptable Power System (UPS- for Telecom)
- ◆ Solar/Photovoltaic /Wind Energy

ISO 9001	ISO 14001	OHSAS 18001	TLC
CE	RoHS	CCC	BV Battery

Constant Current Discharge (Amperes) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	\	334.5	257.8	208.8	151.1	110.4	90.8	55.5	41.8	33.0	27.8	24.4	19.0	16.0	8.20
1.65V	\	323.4	250.1	203.4	147.9	108.1	89.1	54.5	41.1	32.6	27.5	24.1	18.8	15.8	8.13
1.70V	\	308.8	240.0	196.3	143.7	105.2	86.8	53.3	40.3	32.0	27.0	23.7	18.5	15.6	8.03
1.75V	\	289.4	226.4	186.8	138.0	101.2	83.7	51.6	39.1	31.1	26.4	23.2	18.1	15.4	7.89
1.80V	\	263.3	208.0	173.8	130.2	95.8	79.4	49.2	37.5	30.0	25.5	22.5	17.6	15.0	7.70
1.85V	\	227.8	182.7	155.7	119.1	88.0	73.3	45.8	35.2	28.3	24.2	21.4	16.8	14.5	7.42

Constant Power Discharge (Watts) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	\	569	451	371.6	274	203.2	170	105	79.8	63.4	53.7	47.4	37.1	31.5	16.2
1.65V	\	564	446	368.7	273	201.7	168	104	79.0	62.9	53.3	47.0	36.8	31.2	16.0
1.70V	\	545	432	358.4	266	197.2	165	102	77.6	61.9	52.5	46.3	36.3	30.9	15.9
1.75V	\	520	413	345.3	258	191.2	160	99.2	75.7	60.5	51.4	45.4	35.6	30.4	15.6
1.80V	\	481	385	325.3	246	182.2	152	95.1	72.8	58.4	49.9	44.1	34.6	29.7	15.2
1.85V	\	424	343	295.0	228	168.9	141	89.1	68.6	55.4	47.5	42.1	33.1	28.6	14.7

Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.


Dimensions

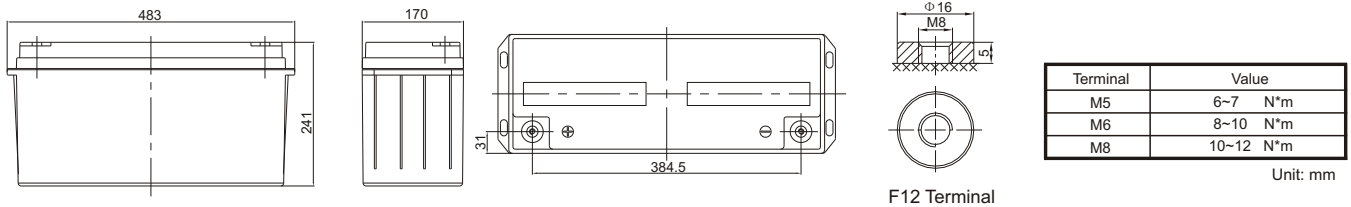


Float Charging Characteristics

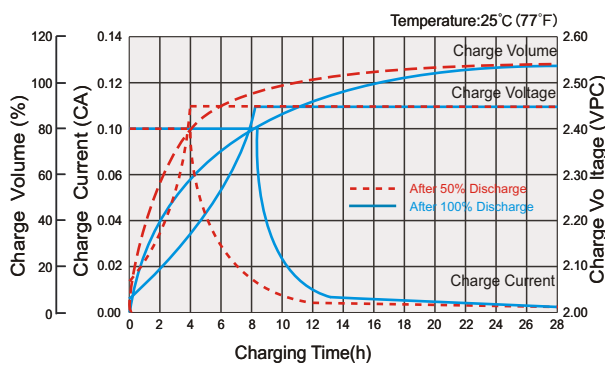


Discharge Characteristics

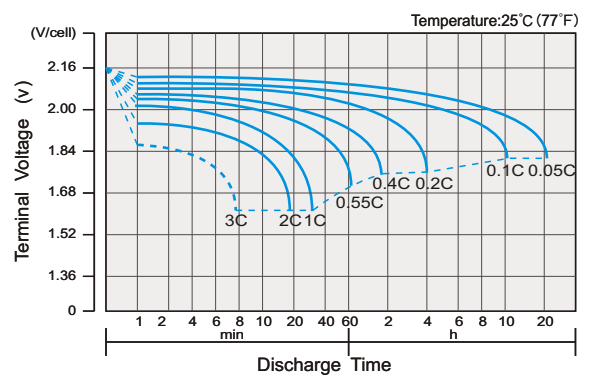


Temperature Effects in Relation to Battery Capacity

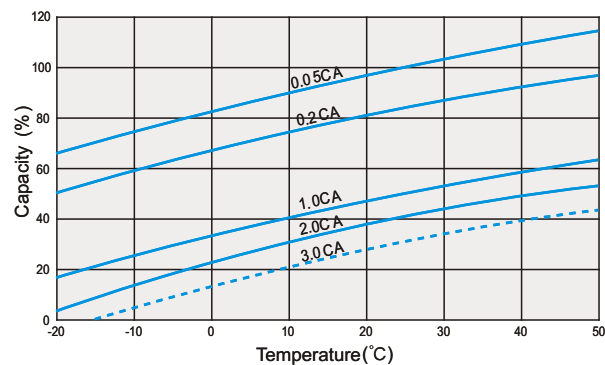


Effect of Temperature on Long Term Float Life

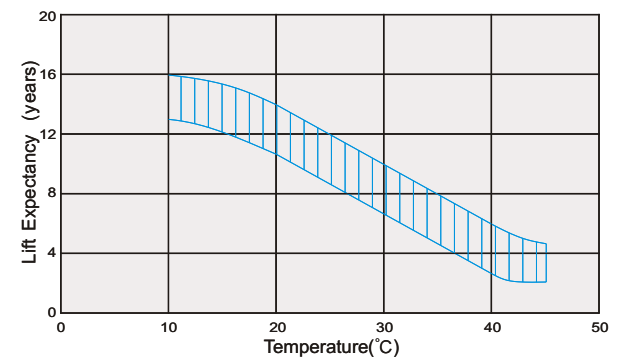

Cycle Life in Relation to Depth of Discharge

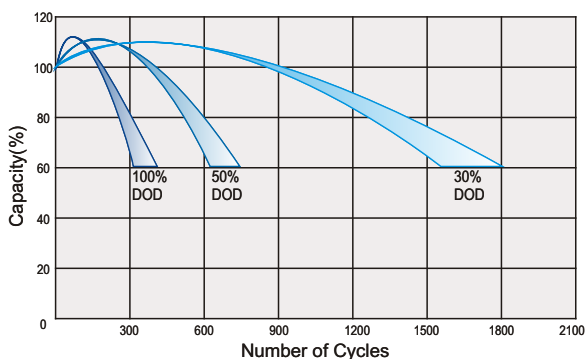

Self Discharge Characteristics

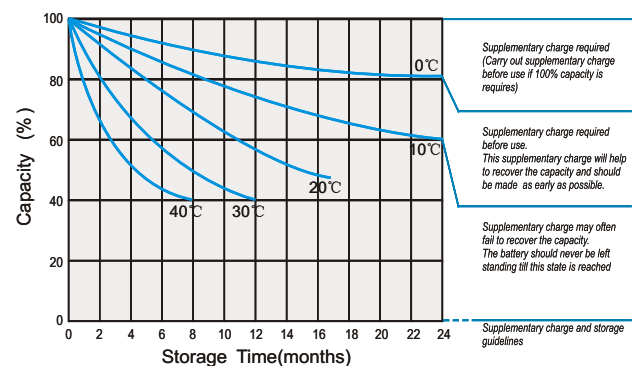

Magnizon MC BATTERIES

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact Magnizon for the latest information.