
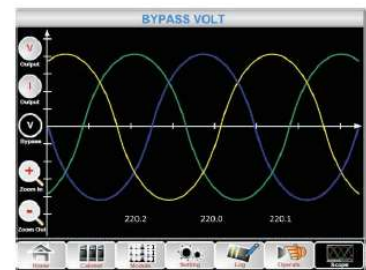


## Model # MURM250/25X

25-250KVA/250KW, 380/400/415V, 50/60Hz True Hot Swappable Modular On-line Double Conversion UPS

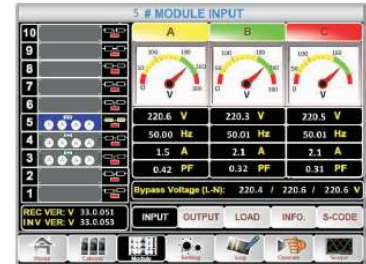

### Product Description

The MURM250/25K Modular UPS with unity power factor true hot swappable power modules provides the most compact footprint of less than 1 m<sup>2</sup> with maximum capacity of 500KVA/500KW with competitive price and high performance. With its upgrade, the MURM250/25K is set to offer better protection for large data centers, as well as for sensitive electrical loads.

### Applications

- Critical applications where ever higher reliability is needed
- Medical & lifesaving equipment's
- Data centers & Larger computer rooms
- Industrial & Petrochemical application
- Banking & Telecommunication
- Power Generation & distribution stations
- Telecommunications.

## Model # MURM250/25X

### Key Features

- Capacities from 25kVA/25KW to 250kVA/250KW in 25kVA modular steps, N+1 Redundancy (up to 225kVA/225KW)
- **Full DSP** control of high stability, reliability and safety
- Friendly human machine interface with **colorful touch screen** of 10.4 inches
- Independent **LCD display** for each power module with self-starting function
- Integrated IGBT module with improved performance and reduced size
- Automatically record the critical wave information when fault happen, easy for trouble shooting
- Monitor runtime of critical components, such as fans and capacitors, settable alarm for service period
- Self-Aging mode for full load test with less than 10% of the total power capacity needed
- **Maximum availability** - 'Six nines' (99.9999%) availability by uniquely combining the benefits of parallel redundancy and 'hot-swap' modularity to ensure 24/7 power availability.
- **High energy efficiency total flexibility & low total cost of ownership** – The combination of high energy efficiency up to 98% and scalable flexibility using 'hot-swap' modules ensures that MURM500/25K offers a low total cost of ownership.
- UPS modules can be simply added, in cost effective incremental steps as the critical load power requirement grows. This ensures the UPS is 'rightsized' at initial installation, reducing the system's initial cost, optimizing its operating efficiency and reducing ongoing operating costs.
- Smart charging management system, intelligently control the whole process of the charging and discharging effectively improve the life time of the battery
- Independent charger for batteries, intelligent battery management system
- Battery cold start, UPS can be powered on from the battery without utility
- Totally front access, top and bottom cable connection
- Quick and simple power upgrade or repair by 'Hot-Swapping' modules while the UPS is online maximizes availability and simplifies system upgrades
- High operating efficiency across a wide load range (90% to 95% efficiency from 25% partial load to 100% full load) reduces system running costs and site air conditioning costs, reducing CO2 emissions.
- High power density with footprints of less than 1m<sup>2</sup> up to 500KW in parallel, 25KVA power module with height of only 3U
- Unity Output & Input power factor .
- Low input harmonic distortion (THDi<3%)

## Model # MURM250/25X

### Product Specification

MODEL		MURM250/25X
Capacity (KVA)	250kVA	
Capacity (KW)	250kW	
Power module	PM25X(25kVA/25kW)	
INPUT		
Phase	3 Phase + Neutral + Ground,400V/415V(line to line)	
Voltage range	304-478Vac (line-line),full load;	
	228V-304Vac (Line-Line),load decrease linearly according to the min phase voltage	
Frequency range	40Hz-70Hz	
Power Factor	>0.99	
THDi	THDi<3% @ 100% linear load	
OUTPUT		
Voltage	380V/400V/415V	
Voltage Regulation	1.50%	
Power factor	1	
THDu	THD<1%(linear load ),THD<5.5%(None-linear load)	
Crest Factor	3:01	
Overload Capability	110% for 1 hour; 125% for 10 minutes ;150% for1 minute; >150% for 200ms	
BATTERY		
Voltage	±240VDC	
Charge Power Precision	±1%	
Charge Power	20%*System Power	
SYSTEM		
System Efficiency	Normal mode:95% ;ECO mode:99% ;Battery mode:95%	
Display	10.4" color touch screen LCD + LED + Keyboard	
IP Class	IP20	
Operation Temperature	0-40°C	
Storage Temperature	0-70°C	
Relative Humidity	0-95%(non-condensing)	
Noise	65dB @ 100% load,	
	62dB @ 45% load	
	(1 meter away)	
PHYSICAL		
Weight	Cabinet	220kg
	Power Module	MUPM25X:32kg

## Model # MURM250/25X

Dimension (W*D*H)	Cabinet	600*1100**2000(mm)
	Power Module	MUPM25X:460*790*134(mm)
<b>COMMUNICATIONS</b>		
Communications Interface	RS232 Serial; Slot for SNMP/Web interface	
Network Management Cards	SNMP-UP2	
Software compatibility	Windows family all versions, Linux, Sun Network OS, IBM Aix, Compaq Tru64 SGI IRIX, FreeBSD, HP-UX and MAC	
UPS monitoring Software	Supplied along with UPS. Optional SNMP card with web based available on request	
Communications Cable	RS232 serial	
<b>CERTIFICATIONS &amp; WARRANTY</b>		
UPS Certifications	CE, EN/IEC 62040-1:2008, EN/IEC 62040-2:2006, EN/IEC 61000-3-3:2013, EN/IEC 61000-3-2:2014	
UPS Quality standards	ISO9001:2015, ISO14001:2015, RoHs	
Product Warranty Period (Worldwide)	2-years limited Warranty	